

HEADQUARTERS

FAAC spa
Via Calari 10 40069 Zola Predosa (BO)
Tel. +39 051 61724 - Fax +39 051 758518
info@faac.it - www.faacgroup.com

FAAC SUBSIDIARIES

FAAC AG
Tel. +41 52 3461721
Fax +41 52 3461723
Illnau, Switzerland
www.faac.ch

FAAC FRANCE
Tel. +33 472218700
Fax +33 472218701
Corbas, France
www.faac.fr

FAAC GMBH
Tel. +49 8654 49810
Fax +49 8654 498125
Freilassing, Germany
www.faac.de

FAAC MIDDLE EAST
Dubai, Emirati Arabi
www.faac.ae
info@faac.ae

F.A.A.C. SA
Tel. +34 91 6613112
Fax +34 91 6610050
Madrid, España
www.faac.es

FAAC UK LTD.
Tel. +44 1256 318100
Fax +44 1256 318101
Basingstoke Hampshire, UK
www.faac.co.uk

FAAC AUSTRALIA PTY LTD
Tel. +61 2 7565644
Fax +61 2 87565677
Homebush – Sydney, Australia
www.faac.com.au

FAAC NORD
Tel. +33 1 69191620
Fax +33 1 69536069
Massy, France
www.faac.fr

FAAC INDIA PVT. LTD
Tel. +91 120 3934100/4199
Fax +91 120 4212132
Noida – Delhi, India
www.faacindia.com

FAAC POLSKA SP.ZO.O.
Tel. +48 22 8141125
Fax +48 22 8142024
Warszawa, Polska
www.faac.pl

F.A.A.C. SA Delegación Cataluña
Tel. +34 93 4362000
Fax +34 93 5727994/4368225
Barcelona, España
www.faac.es

FAAC BENELUX
Tel. +32 50 320202
Fax +32 50 32024215
Brugge, Belgium
www.faac.be

FAAC G.E.S. M.B.H.
Tel. +43 662 8533950
Fax +43 662 85339520
Wals – Siezenheim, Austria
www.faac.at

FAAC INTERNATIONAL INC.
Tel. +1 307 6351991
Fax +1 307 6328148
Cheyenne, USA
www.faacusa.com

FAAC SCANDINAVIA AB
Tel. +46 36 376860
Fax +46 36 370780
Bankeryd, Sweden
www.faac.se

FAAC SHANGHAI
Tel. +86 21 68182970
Fax +86 21 68182968
Shanghai, China
www.faac.com.cn



390 Electro-mechanical operator for swing-leaf gates

FAAC

THE 390 ELECTRO-MECHANICAL OPERATOR IS SIMPLE TO INSTALL, REQUIRING NO WELDING. AVAILABLE IN 230V AND 24V VERSIONS.

24V

- Suitable for gates up to 3m (1.8m without electric lock)
- Ideally suited to residential applications
- The articulated arm allows high flexibility for the installation, including installations with large piers.
- The 24V version has an electronic control board with anti-crushing device and virtual encoder with reverse function upon detection of obstacle.



E024S Control board




452 MPS control board



Emergency kit XBAT 24V with NiMH batteries



EASY TO INSTALL:

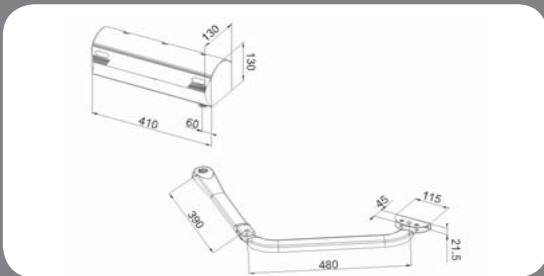

Dimensions of the unit.



Telescopic arm option for bi-folding doors

TECHNICAL SPECIFICATIONS 390

	390	390 24V		390	390 24V
Motor supply	230 Vac	24 Vdc	Operating ambient temperature	-20°C ÷ +55°C	
Absorbed Power	280 W	40 W	Weight	11.5 Kg	
Max torque	250 Nm	200 Nm	Dimensions (L x D x H)	410 x 130 x 130	
Max angular speed	8° /sec		Protection class	IP44	
Reduction ratio	1:700				
Motor rotation speed	960 r.p.m.				